


TOP PIVOT ASSEMBLY


TOP PIVOT BRACKET

BOTTOM PIVOT ASSEMBLY

BOTTOM PIVOT BRACKET

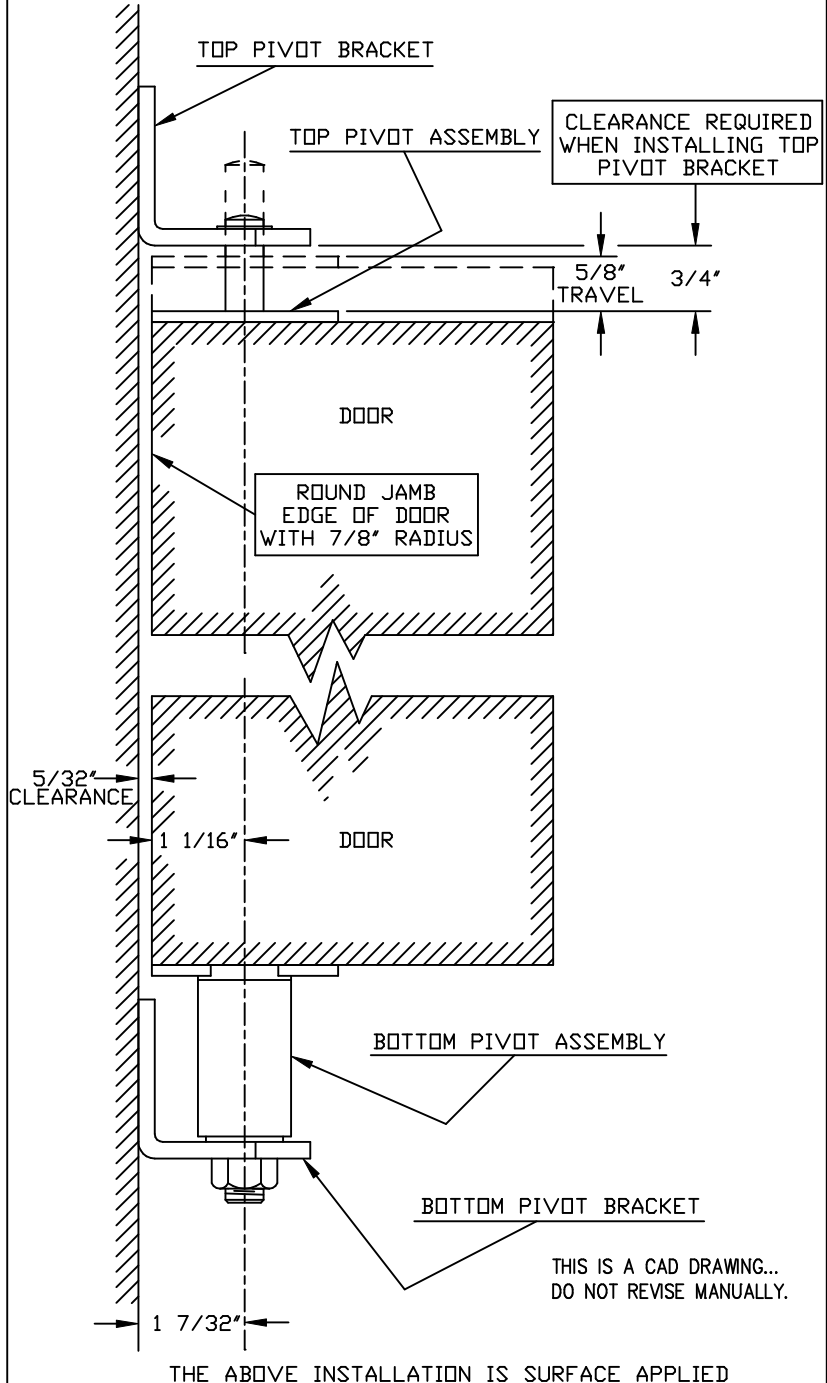

THE ABOVE INSTALLATION IS SURFACE APPLIED

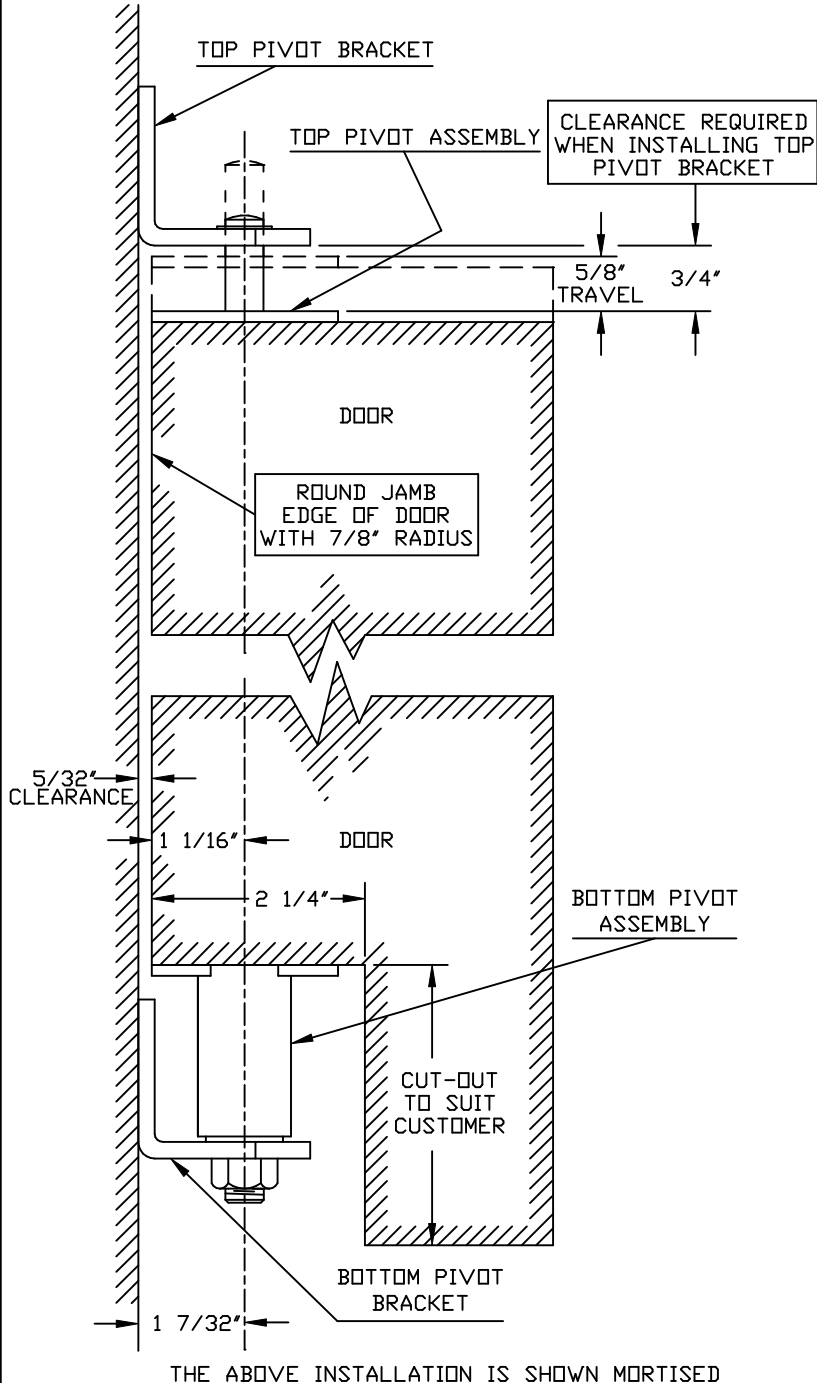

THE ABOVE INSTALLATION IS SHOWN MORTISED

-----DOOR-----	SCREWS	-----NOTE-----	BOMMER IND. INC. LANDRUM, S.C.				
MAXIMUM WIDTH: 30" MAXIMUM WEIGHT: 50 LB. MAXIMUM THICKNESS: 7/8" TO 1 5/8"	TOP AND BOTTOM PIVOT ASSY. No. 10 x 1" F.H.W.S. (4)	DOOR THICKNESS 7/8" TO 1 5/8" *PIVOT EDGE OF DOOR WILL HAVE TO BE ROUNDED TO 7/8" RADIUS FROM THE PIVOT CENTER LINE TO CLEAR JAMB	TYPE : LOUVER DOOR GRAVITY PIVOT DOUBLE ACTING				
	TOP AND BOTTOM BRACKET No. 10 x 1 1/4" F.H.W.S. (4)		PART NO.: 7512 AND 7512-H				
	No. 10 x 1 1/2" F.H.M.S. (4)		Drawn by : JACKSON	DATE	SCALE	DRAWING NUMBER	REV.
			Approved by :	09 AUG 04	N.T.S.	7512TEMP	A